PROCESS SYSTEMS

Refrigeration and Gas Compression Drivelines





Worldwide leader in refrigeration and gas compression

Performance counts

We are the leading manufacturer of refrigeration and gas compression systems worldwide.

With our unmatched application experience, you can depend on York Process Systems, whether you require closed-cycle refrigeration or open-cycle gas compression.

For over a century, our equipment has run some of the most complicated processes in the most demanding industries.

Today, more than 8,000 of our packaged process systems and 17,500 of our drivelines are in operation around the world.

We offer the largest range of screw compressors and centrifugal compressors in the world

With Frick® screw compressor models ranging in size from 72 CFM to 8,212 CFM, and York® multistage centrifugal compressor models ranging from 400 CFM to 26,000 CFM, York Process Systems has the industry's largest fleet of available compressor driveline products to meet your refrigeration or gas compression needs. Whatever your application, we have the best-fitting compressor, from space-saving to energy-saving. Our advanced technology and conformance to API standards bring exceptional compressor reliability and efficiency, along with 150 years of industry-leading experience.



Markets We Serve:




Chemical & Petrochemical



Industrial Gases





Energy-Carbon Capture & Sequestration




Climate Test Chambers



Pharmaceutical



Oil & Gas Transportation



Oil & Gas Processing

Power Generation






A world of experience

Engineering, equipment and service to handle the toughest applications





Frick Screw Compressors

- 72 to 8,212 CFM (122 to 13,952 m³/hr)
- Up to 6,000 hp (4,474kW)
- Electric motor, gas engine, steam turbine drive
- Slide valve for efficient capacity control
- Variable volume ratio (Vi) eliminates over/under compression
- Open-cycle gas compression and closed-cycle refrigeration service
- Hydrocarbons, natural gas, CO₂, hydrogen, halocarbons, mixed gases, ammonia and others
- Designed in conformance with API 619

Optional Features For Highly Critical Gas-Processing Applications

- Accelerometers for bearing monitoring
- Cast steel casings
- Sour gas bearing packages
- Tandem seals (wet inboard seals and dry-running outboard seals)
- High-efficiency oil removal systems



The **York M TurboMaster** multistage centrifugal compressor is designed for heavy industrial use and has proven itself in over 3,000 demanding gas compression and refrigeration applications worldwide in the chemical, petrochemical, hydrocarbon processing and refining industries.

The York M TurboMaster Centrifugal Compressor

- Up to 26,000 ACFM (44,174 m³/hr)
- Up to 15,000 hp (11,185 kW)
- Over 3,000 in operation in process applications
- 800+ on hydrocarbon service
- 300+ gas turbine driven
- Onshore and offshore
- Built by York for 50 years
- Open-cycle gas compression and closed-cycle refrigeration service
- Hydrocarbons, natural gas, CO₂, hydrogen, halocarbons, mixed gases, ammonia and others

Features

- Rugged between-the-bearings design
- One to eight stages
- Cast iron, nodular iron, cast steel casings
- Aluminum or stainless steel impellers
- Prerotation vanes for capacity control
- Modular lube systems

PROCESS SYSTEMS

Drivelines with Frick screw compressors

Rotary screw compressor units are engineered and manufactured to meet the exacting requirements of the industrial refrigeration and gas compression markets, in accordance with API 619. All components have been designed and arranged to ensure reliability, accessibility and ease of service.

Screw compressor technology - fewer moving parts and simple rotary motion mean:

- Less maintenance
- Lower noise and vibration levels
- Lower total repair costs

Compressor: The Frick compressor has been designed around the latest technology to offer the most reliable and energy-efficient unit currently available. All screw compressor casings are designed and tested in accordance with the requirements of API 619 and ASHRAE 15 safety code. The rotors are manufactured from forged steel and use the latest asymmetric profiles.

Capacity Control: Capacity control is achieved by use of a slide valve, which provides fully modulating capacity control from 100% to approximately 15% of full load.

Variable Volume Ratio Control: The compressor includes a patented method of varying the internal volume ratio to match the system pressure ratio, eliminating the power penalty associated with overcompression or undercompression.

Lubrication System: The compressor is designed specifically for operation without an oil pump. All oil required for main oil injection and lubrication is provided by positive gas differential pressure.



Available in both vertical and horizontal orientations to meet specific design requirements.

SuperFilter™II: Efficient oil management leads to longer bearing life. SuperFilter™II makes oil cleaner than new. It captures 99% of particles 5 microns and larger.

Dual Oil Filters: Serviceability is serious business. Mount a second oil filter on your Frick compressor package to ensure continuous operation during service of the primary filter. Isolation valves are included.

External Oil Cooling: Eliminate capacity and power penalties by using Frick thermosyphon or water-cooled oil coolers. Both use the latest technology in plate design and are constructed according to ASME Section VIII, Division I. Air-cooled oil cooling is also available.

Easy to Service: Frick keeps the service technician in mind. All critical package components for service and maintenance are easy to reach and are located on the same side of the package.



Frick screw compressors are designed and manufactured with antifriction roller bearings



Save energy

Antifriction roller bearings in a screw compressor use less horsepower. For example: 300-hp Frick screw compressor with antifriction roller bearings will consume 11 fewer horsepower than a conventional screw compressor using sleeve bearings.

No oil pumps

Frick screw compressors with antifriction roller bearings do not require oil pumps, as opposed to conventional screw compressors that use sleeve bearings.

Higher efficiency

Antifriction roller bearings operate with tighter tolerances than conventional sleeve bearings. Frick screw compressors with antifriction roller bearings have significantly tighter tolerances, resulting in superior efficiency.



Frick is leading the industry in screw compressor development and our new 408 mm compressor is the latest example!

408 Model Compressor

- Capacity up to 8,212 CFM
- Housings available in ductile iron and cast steel
- Frick high-efficiency rotor design
- ANSI flange connections
- Variable capacity control from 100% down to 15%
- Volume ratio control, standard
- Roller-type radial and thrust bearings
- Available with sleeve-type radial bearings and tilting pad thrust bearings
- Externally accessible proximity probes and bearing RTDs
- Compliant with API 619 standards

Typical screw compressor drivelines





Ammonia production, Europe



Chlorine liquefaction, Brazil



NGI plant, U.S.



Vapor recovery, Peru



Chlorine liquefaction, Brazil



Prime cooling, U.S.



Gas processing, Russia



Polysilicon production, China



General plant refrigeration, Southeast Asia



Steam turbine-driven driveline, Indonesia

Typical multistage centrifugal drivelines







Gas processing, Trinidad



Bolt-up base to gas turbine drive, offshore platform, Malaysia



District cooling, U.S.



Distillation column heat pump, U.S.



Gas processing, U.S.



LNG peak shaving, U.S.



Propane refrigeration, Middle East



Drivelines with York centrifugal compressors



4,000-hp driveline in gas-processing application

Since 1955, York has been the leader in building and supplying heavy-duty centrifugal compressors. We can provide one to eight stages of compression, in capacities from 400 to 26,000 ACFM, with 200 to 15,000 horsepower.

All compressors are built with a complete, self-contained, factory-tested control system and lubrication system. The driver can be an electric motor, gas turbine, steam turbine or reciprocating engine. York compressors can be used in twin and tandem arrangements.

Hydrocarbons, halocarbons, process gases, air, ammonia, CO₂ and other gases can be compressed for applications including gas gathering, gas lift, hydrocarbon refrigeration, fuel gas compression, residue gas recompression, recycle gas and overhead compression in distillation and fractionation processes.

More than 3,000 York compressors are in operation both onshore and offshore.



Steam Turbine Driving M Compressor



York TurboMaster compressors proven in action



Designed for 24-hour-a-day service to meet the demands of continuous production

York TurboMaster "M" compressors are designed and built to deliver continuous service, hour after hour, day after day, year after year. They are centrifugal-type compressors, which means:

- Fewer moving parts; fewer wearing parts
- No valves, pistons, rings, connecting rods, wrist pins or similar parts that wear out and often create problems
- Impellers revolve on a common shaft to produce the required compression – a simple trouble-free mechanism



Up to eight stages in one casing

York multistage TurboMaster compressors are available with one to eight impellers in a single casing.

Compact, lightweight design


York engineering has designed an extremely compact machine. Lighter-weight, too!

With a host of built-in performance and durability features, and with a wide choice of materials for seals, casings and impellers, the York TurboMaster is tailored to your requirements, yet gives you the benefit of a standard product.

100 years of compressor manufacturing experience

We manufacture all our screw compressors in Waynesboro, PA, and all our multistage centrifugal compressors in York, PA. Both machines are designed and built by our company, including machining of housings and parts. Final assembly occurs under clean, temperature-controlled conditions.

They are high-speed precision rotor-cut and finished. Automated centers maintain the close tolerances required for maximum compressor efficiency and reliability.

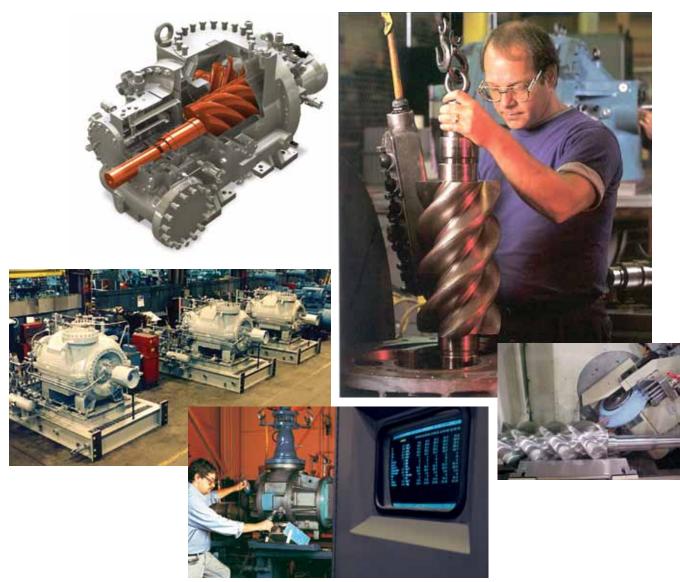



Designed for durability. Built with precision.



Control versatility



The Quantum™LX Control Panel

The Quantum™LX Control Panel is the most technologically advanced compressor control center in the world today.

- Large, active, color VGA display with intuitive operator interface
- On-screen calibration
- Serial and Ethernet communications, including Allen-Bradley, Modbus and others
- Display available in a variety of languages
- Real-time and historical trending, accessible via web browser or download to USB storage device
- Programmable PID control functions
- Annunciation and shutdown history
- UL, cUL, CE, IEC and ISO 9001 certifications
- Suitable for harsh and hazardous environments



PhD™ Vibration Monitoring System

The PhD™ Vibration Monitoring System is specifically developed for screw compressors with antifriction bearings.

- Continuous onboard vibration monitoring system to detect the early stages of compressor bearing failure
- Accelerometers mounted over the bearing positions on both ends of the compressor
- Also effective for antifriction bearing motors (both accelerometers and bearing RTDs)
- Output signals fed directly to the Quantum[™]LX for monitoring pre-alarm and shutdown



Custom PLC Panels

We design and build PLC panels for both centrifugal and screw compressor systems

- Custom-designed for the specific project requirements
- A typical architecture uses Allen-Bradley ControlLogix, SLC500 or PLCS Series PLC and hardware (other manufacturers available)
- Available unit mounted or freestanding in carbon steel, stainless steel or fiberglass enclosures.

Global Manufacturing Locations



More Than 300 Service Offices strategically located around the globe.

Johnson Controls - YORK Process Systems Major Sales Offices

HEADQUARTERS

Ron Rose, Director, Process Systems 100 CV Avenue Waynesboro, PA 17268 Tel: 717.765.2510 Mobile: 717.729.0361 E-mail: ronald.w.rose@jci.com

AFRICA

Russell Hattingh, Operations Mgr 42 Electron Ave Isando, 1600 South Africa Tel: +27.11.921.7129 Mobile: +27.82.330.3734 E-mail: russell.hattingh@jci.com

AUSTRALIA

Terry Presley, Mgr YPS Australia Unit 4 / 101 Newmarket Road Windsor, QLD, Australia, 4030 Tel: +617.3630.3018 Mobile: +61.407.296.647 E-mail: terry.presley@jci.com

CHINA

Cicci Xi, GM Refrigeration China
No. 1255 Xikang Road
Shanghai, 200060
People's Republic of China
Tel: +86.21.6276.6509
Mobile: +86.13.7615.02338
E-mail: cicci.xi@jci.com

EUROPE

Ralf Zimmermann,
Director Markets - Process Systems
Gottlieb-Daimler-Str 8
Mannheim, D-68165
Germany
Tale 140 621 468 630

Tel: +49.621.468.620 Mobile: +49.160.711.5452 E-mail: ralf.zimmermann@jci.com

INDIA

Haresh Rupchandani, Sales Manager 301, Zenith Complex Condominium 28/2 K.M. Gandhi Path, Shivaji Nagar, Pune, Maharashtra, India – 411 005 Tel: +91.20.3028.8108

Mobile: +91.99232.00941 E-mail: haresh.rupchandani@jci.com

KORFA

Chol Choi, Sales Manager 2Fl., Shinsegae I&C Digital Center, 197-12, Guro-dong, Guro-ku, Seoul, 152-848, Republic of Korea Tel: +82.2.554.5935

Mobile: +82.10.9710.6185 E-mail: chol.choi@jci.com

LATIN AMERICA

CV Grana, Sales Manager 10644 West Little York Rd, Suite 200 Houston, TX 77041 - USA Tel: 713.934.2403 Mobile: 713.677.4649

E-mail: candido.v.grana@jci.com

Alla Golubeva, Field Operations Mgr

RUSSIA

Poklonnaya #14 Moscow 121170 Russia Tel: +7.495.232.6660 E-mail: alla.golubeva@jci.com

SINGAPORE

Erik Voon, Sales Manager 10 Upper Aljunied Link #08-00 Johnson Controls Building Singapore 367904 Tel: +65.65172816 Mobile: +65.9695.4666

E-mail: erik.voon@jci.com

TAIWAN

Johnson Chiang, Bus Devt Mgr 10F, No. 88, Jhouzih Street NeiHu District, Taipei, 11493 Taiwan

Tel: 886.2.2657.5568 Mobile: 886.97.277.6356

E-mail: johnson.cs.chiang@jci.com

MIDDLE EAST

Sarvesh Baser, Sales Manager P.O. Box 31065 Suite 1704, 17th Floor API World Tower Sheikh Zayed Road Dubai, UAE Tel: +971.4.3099.999, Ext: 735

Mobile: +971.4.3099.999, EXC: 735 Mobile: +971.56.683.2514 E-mail: sarvesh.baser@jci.com

UNITED STATES & CANADA

Kurt Liebendorfer, Director, Process Systems Sales NA 100 CV Avenue Waynesboro, PA 17268 Tel: 717.765.2451 Mobile: 717.830.6058

E-mail: kurt.m.liebendorfer@jci.com

Form 180.070-SG4 (2011-10)

Supersedes: 180.070-SG4 (2011-09)
Subject to change without notice
Printed in USA • GUI 1M 1011
© 2011 Johnson Controls, Inc. ALL RIGHTS RESERVED



100 CV Avenue Waynesboro, PA 17268 USA Phone: 717-762-2121 • Fax: 717-762-8624 www.johnsoncontrols.com/yps